2– SLOTTED HOLES 12 DIA. ON A 315 P.C.D. SPACED AS SHOWN. FIT BOLTS ITEM 7, 8, & 9.

6– HOLES 12 DIA. ON A 315 P.C.D. SPACED AS SHOWN. FIT BOLTS ITEM 7, 8, & 9.

DRILL 12 DIA. HOLE. WELD SOCKET ITEM 4 OVER.

DRILL 25 DIA. HOLE. WELD SOCKET ITEM 5 OVER. FIT PLUG ITEM 6.

NOTES!

SEE SHEET 1. FOR MATERIAL LIST, WELDING, AND FINISHING NOTES.

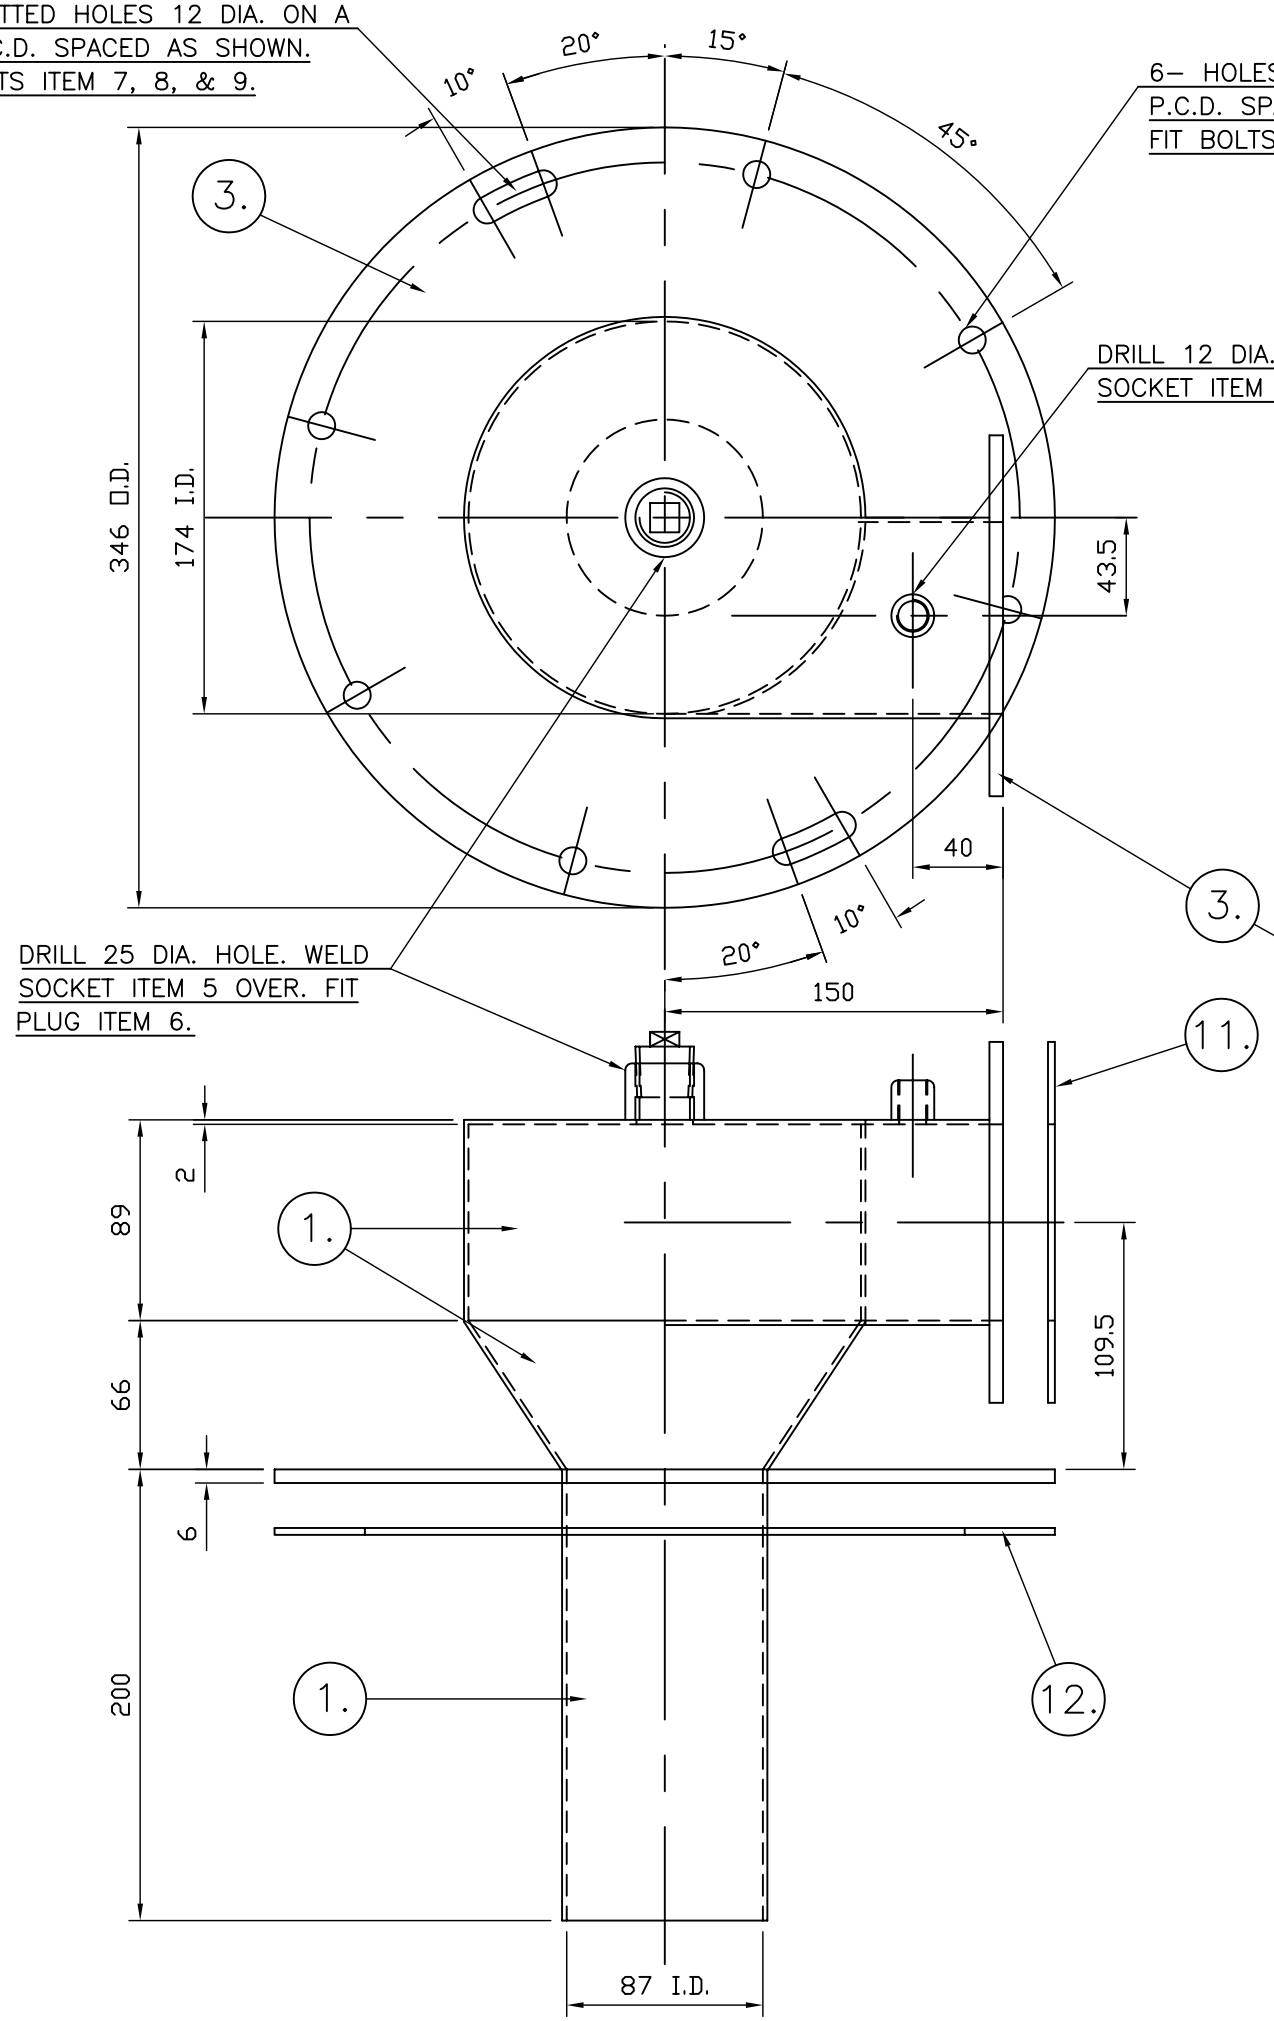

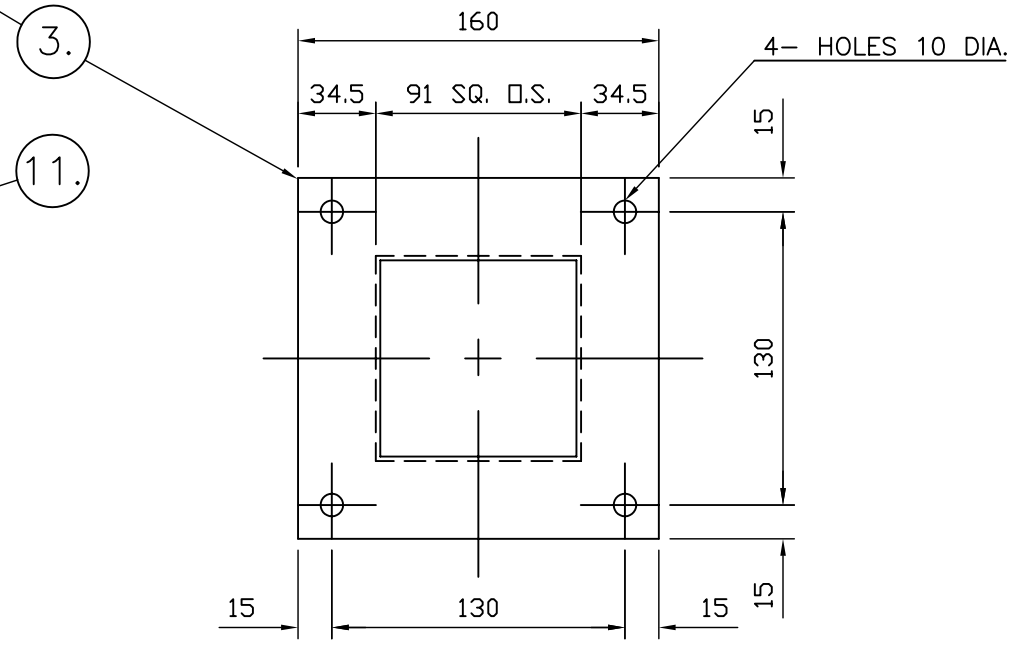

△	DESCRIPTION	DATE	BY	CHKD

CYCLONE – AIR DISCHARGE DETAIL.

DRYTEC

Specialists in Drying Technology
Drytec Ltd., Morley Road, Tonbridge,
Kent, TN9 1RA, England.
Tel: +44 (0) 1732 362611
Fax: +44 (0) 1732 770776
E-mail: DrytecLtd@aol.com

This drawing and design is the property of DRYTEC LTD. and must not be copied or duplicated, nor used without specific permission from DRYTEC LTD. or its associates.

3" RING DRYER.

USED ON:	DRAWN BY: M.C.R.W.	JOB No: DRP2205
TAKEN FROM:	CHECKED BY:	DRAWING NUMBER D2205/04
DO NOT SCALE IF IN DOUBT ASK.	DATE: 14-03-97. (11-02-05. C.A.D.)	SHEET 2 OF 2.
	SCALE: 1 : 2.5	

0 1 2 3 4 5 6 7 8 9 10