


INLET AND OUTLET MUST BE GUARDED BY THE CLIENT TO ENSURE THE OPERTOR CAN NOT GET TO THE WORKING PARTS AS EN ISO 13857:2008.

ALL SAFETY INTERLOCKS TO BE WIRED INTO MOTOR CONTROL CIRCUIT.
INTERNAL: ATEX ZONE 22, T135
EXTERNAL: SAFE AREA

WORKING: 250MBARG
DESIGN: 400MBARG

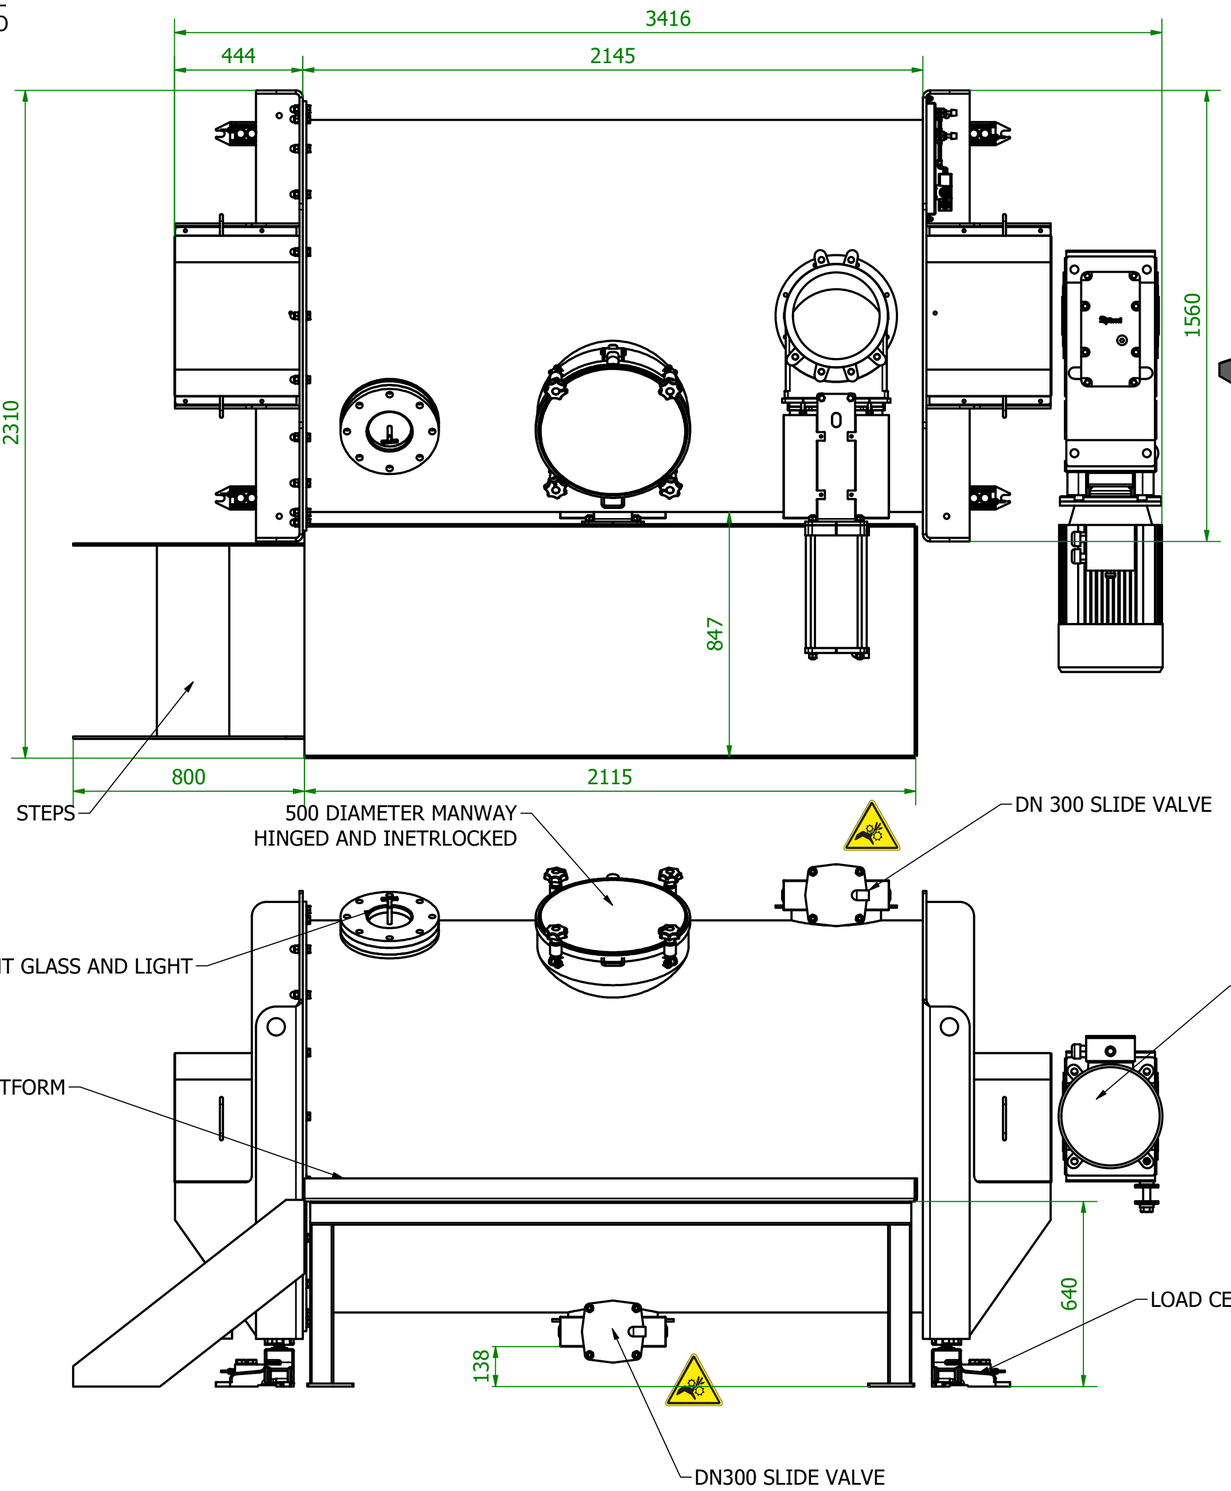

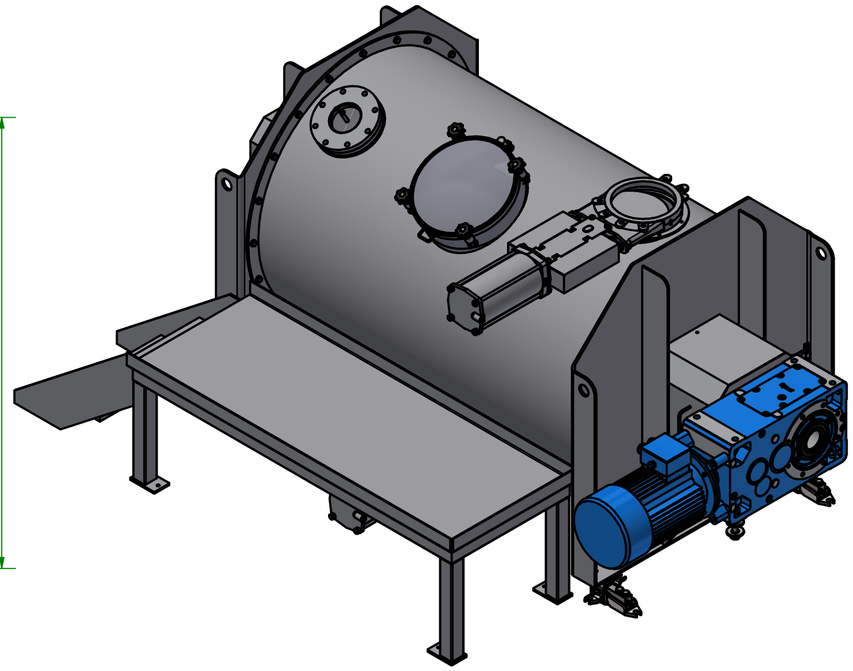

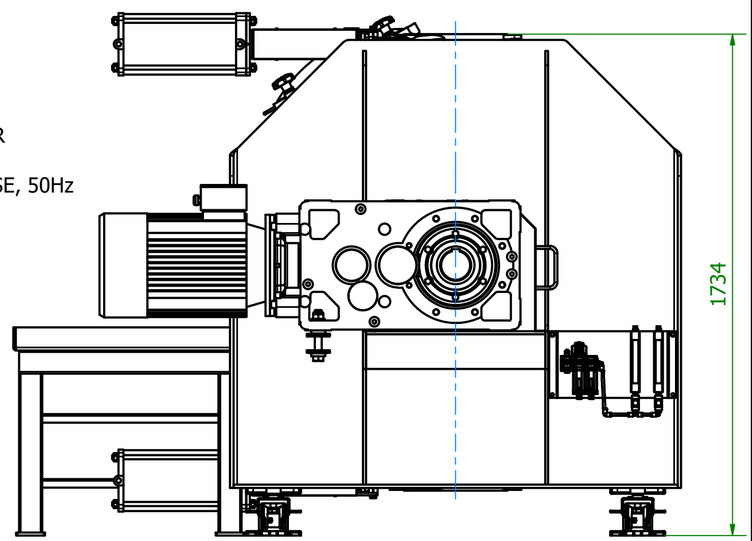

This drawing is the property of Harbrotek and must not be copied or shared without written consent of this company ©

Tolerance Specification

Sheet metal dimensions
0 - 400 ± 1.00
400 to 1000 ± 2.50
Over 1000 ± 3.00

Angle dimensions
± 0 - 40'

Machined dimensions
0 -200 ± 0.25
Over 200 ± 0.50

Unmachined dimensions
0 -200 ± 0.60
Over 200 ±2.00

Designed by	Approved by	Third Angle Projection	Scale	Date	All dimensions in mm
B.J.ABBOTT				25/06/2021	

Habrotek

2000L RIBBON MIXER, (CCM TECH)

	Edition	Sheet
C2021836-01	A	1 / 1